


5 TORCH PARTS

FOR INPUT VOLTAGE 380-440V 3F.

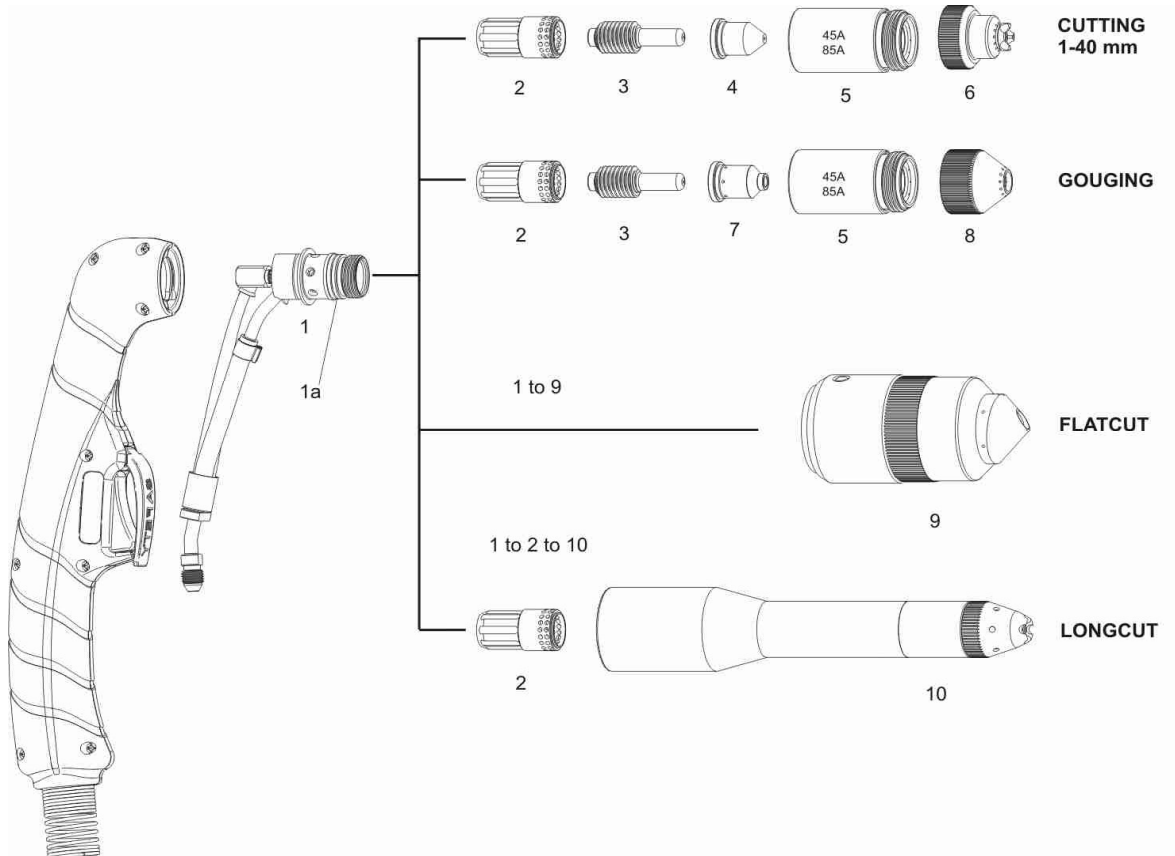

POS.	DESCRIPTION	PRODUCT NUMBER	COMMENTS
1	TORCH HEAD UPH-125	404220	1 PCS
1a	O-RING	-	Spares supplied in Consumables Set
2	SWIRL RING UPH-125	404225	2 PCS
3	ELECTRODE UPH-125	404230	5 PCS
4	TIP CUTTING UPH-125	404235	10 PCS
5	SHIELD CUP BODY UPH-125	404240	1 PCS
6	SHIELD CAP UPH-125	404245	3 PCS
9	Special Application FLATCUT UPH-125	404250	1 KIT
10	LONGCUT UPH-125	404255	1 KIT
7 & 8	GOUGING UPH-125 SET FOR UPC NEO NG	404265	TIP GOUGING 10 PCS SHIELD CAP - GOUGING 3 PCS
	CONSUMABLES UPH-125 SET FOR UPC NEO NG	404260	ELECTRODE 10 PCS TIP CUTTING 10 PCS SWIRL RING 1 PCS SHIELD CUP BODY 2 PCS SHIELD CAP 2 PCS O-RING 3 PCS


TORCH AND ACCESSORIES:

TORCH UPH-125 WITH 6M CABLE F/UPC-NEO NG 404210

TORCH UPH-125 WITH 12M CABLE F/UPC-NEO NG 404215

SPECIAL APPLICATIONS:

5a – FLATCUT CARTRIDGE

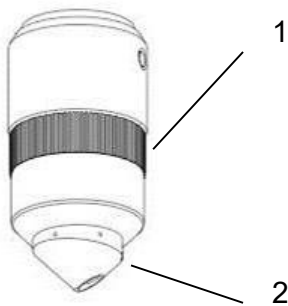


HOW TO SET THE FLATCUT CONSUMABLE

- Install Flatcut Cartridge to UPH-125 plasma torch
- Unscrew the part n.1 (Retaining ring)
- Turn the part n.2 (nozzle spraying cone) in the direction of the piece to cut
- Screw and fix the Retainer part n.1(*)

(*) ATTENTION


If the Retainer part n.1 is not screwed and fixed properly, when you press the RESET button the display will show P.I.P error alarm

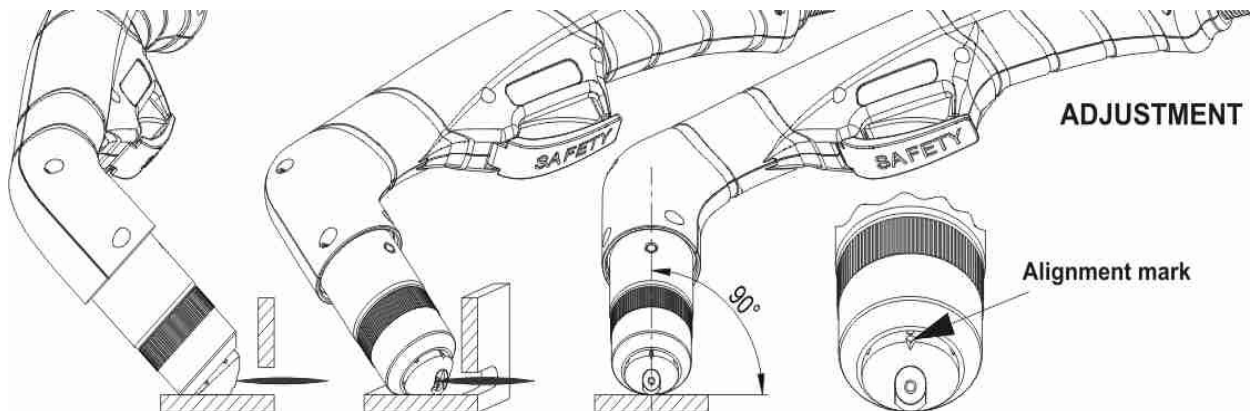

5b – LONGCUT CARTRIDGE



HOW IS IT COMPOSED

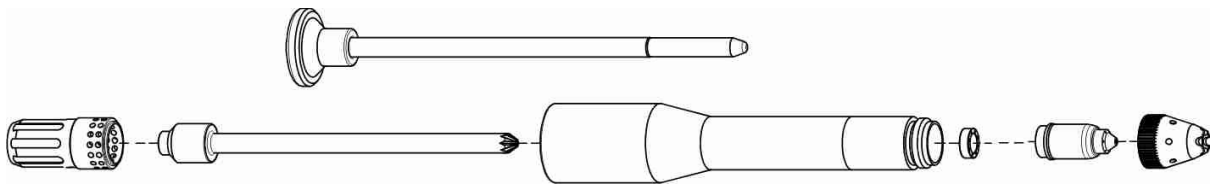

LONG CUT CONSUMABLE

These are extra-long consumables with a narrow profile, essential in areas that are impossible to reach with standard equipment.

- Great visibility during cutting
- Suitable for extended reach to cut in narrow and/or difficult to reach area
- Ease of use
- Cutting Quality

The maximum recommended thickness is: 70A = 12.5 mm (5/8 inch)

LONGCUT cutting operations

