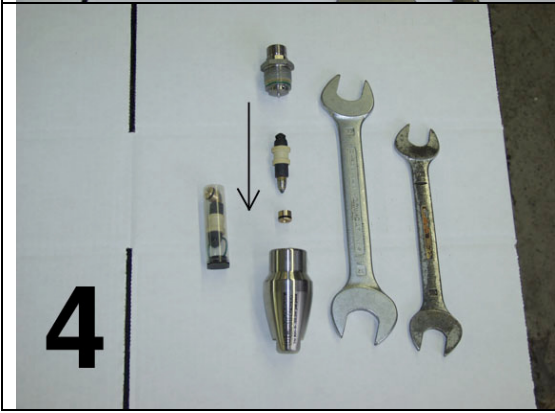
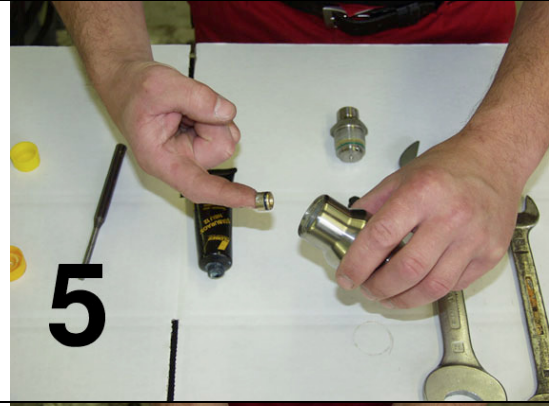
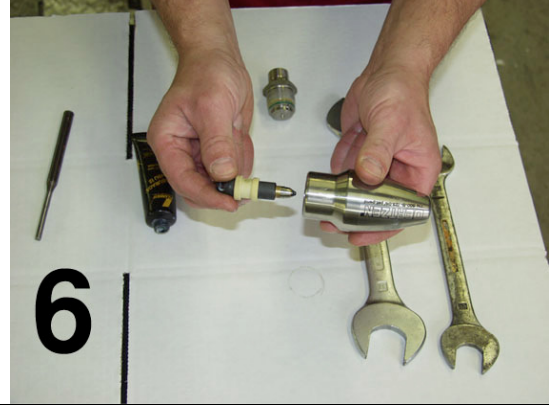
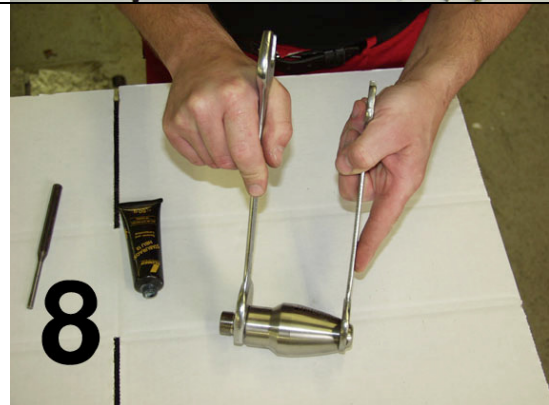


Repair Instructions Powerspeed Attachment

		required materials: • repair kit • silicone lubricant • 2 wrenches size 24 and 32 • drift punch 6 mm
		Remove screw joint and take nozzle insert out of housing (↑).
		Put drift punch into nozzle outlet and push out nozzle seat. Thoroughly clean powerspeed housing internally, blow through with compressed air.
		Fig. 4 shows installation order of individual parts (↓).

		Lubricate O-ring of nozzle seat with silicone lubricant, insert nozzle seat into housing, push it in tightly.
		Attention: Holding powerspeed housing horizontally, push nozzle insert into housing.
		Install screw joint, nozzle insert must not be blocked/buckled.
		Tighten screw joint properly. Test: When shaking the powerspeed attachment nozzle insert to audibly move inside. Properly connect powerspeed attachment to spray wand.

Start-up:

Before starting the machine/opening spray pistol direct spray wand downward until water emerges. Then put spray wand into working position.

Important Notes:

Machine only to be run with clean water.
Filter cartridges to be changed regularly.
Powerspeed attachment not to be used for hammering, etc.

